

Vertical Stack Two-Pipe Fan Coils

Model DL(E)



Leading Manufacturer of High-Rise
Residential HVAC Equipment




APARTMENTS | CONDOS | ASSISTED LIVING | HOTELS | RESORTS

Components

SERIES - DL(E)


Series DL(E) is a two (2) pipe system that comes with a two way valve piping arrangement. 3-way motorized valve piping arrangement also available. Available with an integrated ERV/HRV module in a slightly larger cabinet size. DLE series comes with an auxiliary heat element option with internally mounted water temperature sensors.

Available CFM Range					
350	450	600	800	1,000	1,200

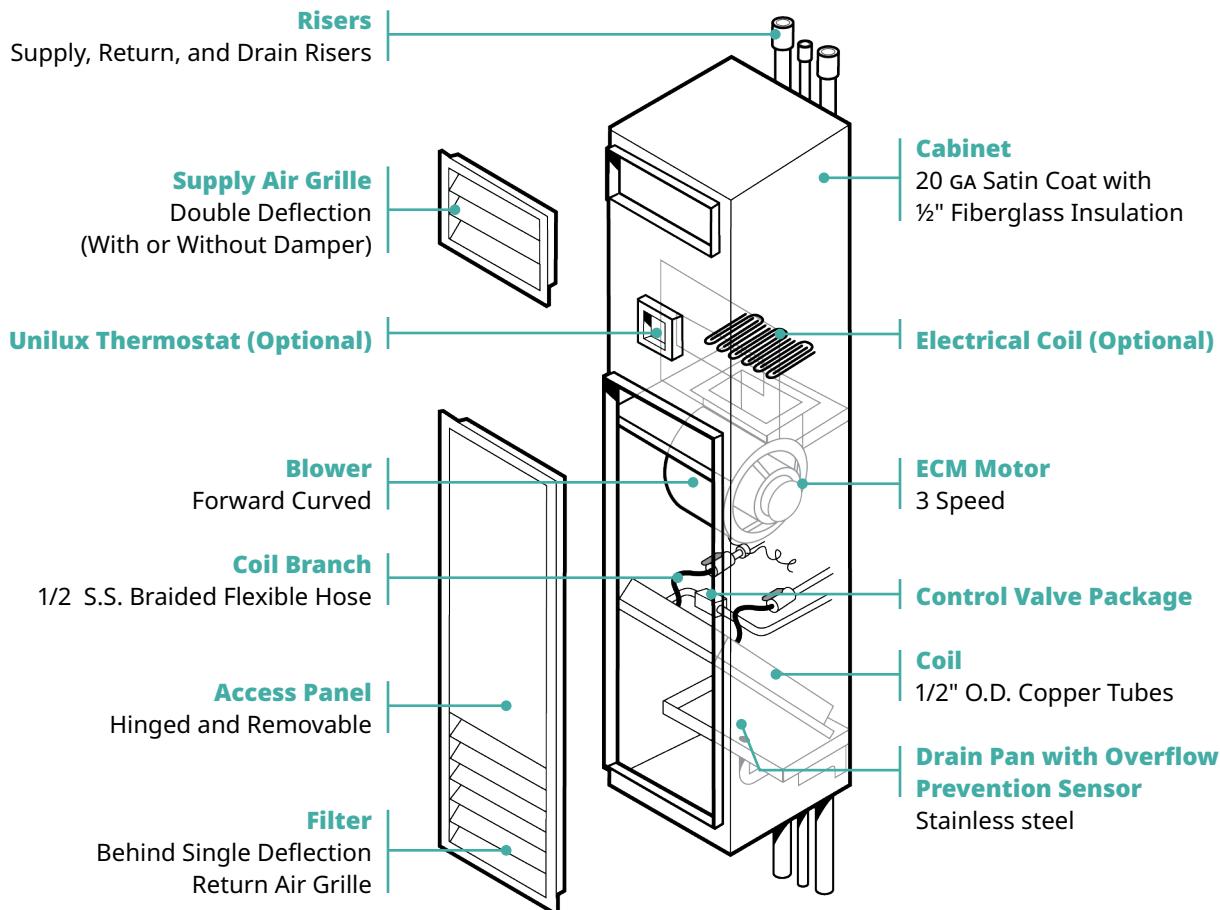

ERV Upgrade

Unilux HVAC has developed a patented energy recovery ventilation system (ERV) that can be integrated with our full line of vertical stack fan coils. Our ERV cores further enhance comfort by transferring moisture between exhaust and fresh air, providing cost-effective moisture control. Our integrated ERV solutions include multiple dampers and temperature sensors to ensure cores do not freeze when outside temperatures drop below freezing, without the need for an electric heater.

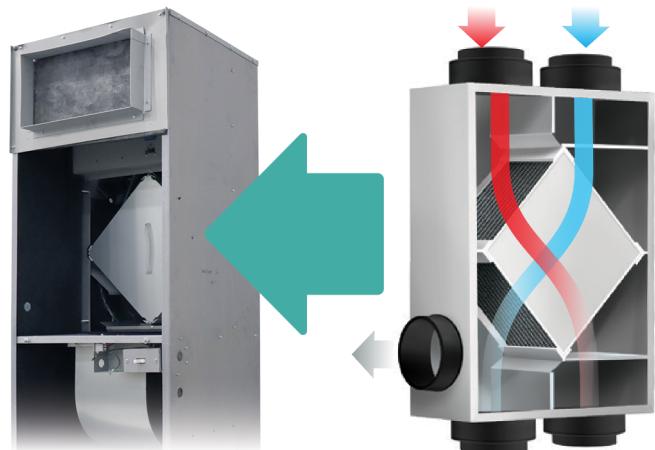

Standard Features

Unilux vertical stack fan coil units meet the requirements of UL 1995 / CSA22.2 #236 – Issue 2011 Standard for safety heating and cooling equipment.

Cabinet

20-Gauge satin coat steel. Cabinet is fully insulated with ½" fiberglass bonded with a thermosetting resin and coated on the air stream side with an acrylic facing without the use of flammable adhesives. Insulation inside the unit: Flame spread rating no more than 25; Smoke developed rating no more than 50.

Coil Assembly

Coils corrugated aluminum fins mechanically bonded to ½" OD Copper tube. The number of rows and circuiting are selected to suit scheduled capacities. Coils are tested at 450 psig and are rated for a maximum working pressure of 300 psig.

Motor/Blower Assembly

A thermally-protected, multi-speed ECM motor is resiliently mounted to a centrifugal fan which has a galvanized steel forward curved DWFI wheel. Available CFM: 350, 450, 600, 800, 1000, and 1200.

Stainless Steel Drain Pan

Drain pan is one-piece stamped stainless steel product designed to slope in to directions to allow for complete drainage. The drain hose from the outlet to the condensate riser shall form a running P-trap. The underside of the drain pan is insulated with ½" thick thermal and sound insulation.

The Piping Branches

Are constructed with ½" type "L" copper, and stainless steel braided flex hoses to allow for movement due to expansion and contraction of risers; include shut-off ball valves with flare nuts in the supply and return branches for easy removal.

Risers

Supply and return risers are type 'L' copper and condensate risers are type 'DWV' copper. All have 75 mm (3") deep expanded ends to facilitate field installation. Supply & Return risers are insulated with 1" fiberglass covered with vapor barrier jacket, which complies with ASTM 84 for flame-spread and smoke-developed ratings. The insulation is continuous over the riser length within the height of the cabinet.

Control Valve Package

Provide a standard factory assembled 2-way control valve with motorized electrical "ON/OFF" controlling. Provide 3-way motorized valves on top and bottom of each riser to allow for continuous flow through riser system. Maximum entering water temperature on the control valve shall be 200°F, and maximum operating pressure shall be 300 psig.

Access Panel

Access panel assembly is constructed of 20 gauge steel complete with a durable baked enamel powder finish, with integral grille for the return air opening. The panel is hinged removable to allow for easy filter exchange. The integral core grille has fixed horizontal louvers.

Grilles and Registers

Double deflection supply grilles and registers have adjustable vertical or horizontal louvers. Registers constructed with light-gauge metal complete with adjustable opposed blade dampers.

Filters

MERV 8-13 filters available.

Overflow Prevention Sensors

Installed drain pan overflow sensor detects rising drain pan levels and turns off unit to prevent leaking. Anti-Freeze Temperature Sensor activates hot water connections when return air is below +4°C (40°F) to prevent freezing.

Optional Features

Cabinet

- A 2", 4" or 6" raised base.

Coil and Piping assembly

- Alternative control valve: 3-way control valve in lieu of 2-way control valve.
- Automatic balancing valve installed inside the fan coil.
- BTU thermal meter and thermal sensors installed inside the fan coil.
- Pressure independent control valve.
- Flood Protection valve assembly.

Electrical & Fan assembly

- Alternative fan: ECM constant volume fan.
- Rating of motors: can be 115v or 208v

Risers

- Type "M" copper for drain risers.
- Drain risers insulated.
- Riser pipe insulation thickness can be from 1" to 1 1/2".
- Alternative riser insulation material: closed-cell material.

Supply & Return air grilles, access panels, and filters

- Aluminum supply air grilles, return air grilles and access panel.
- Alternative filters: 1" pleated MERV-8 filter, 1" pleated MERV-11 filter, or 1" pleated MERV-13 filter.
- Supply air grilles integrated with manual-adjustable balancing damper.

Unilux HVAC Thermostat with Wi-Fi Connectivity

Wi-Fi connectivity enables access to Unilux HVAC thermostat app for total HVAC control anytime at home or on the go through a mobile device.



Our state-of-the-art designs are demanded by today's best developers, engineers and owners. Contact us to learn why Unilux HVAC is the preferred choice of professionals throughout North America for vertical stack HVAC solutions.

1 (905) 851-3981

info@uniluxhvac.com

7930 Huntington Road Unit A
Woodbridge, ON L4H 4M8

